

TKPW5000 (LiFePO4 51.2V100Ah, 5120.0Wh)


- Safety in use
- Low self discharge rate
- Good high temperature performance High Cycle times and long service life
- High energy density and conversion efficiency Environmental Friendly, without any heavy metals
- Easy installation, easy BMS modbus protocol
- can communicate with the inverter



	Item	Specification
Electrical Characteristics	Nominal Voltage	51.2V
	Nominal Capacity	100Ah (C ₅ ,25°C)
	Energy	5120Wh
	Internal Resistance	≤500mΩ
	Cycle Life	>6000 cycles
	Months Self Discharge	<3%
	Efficiency of Charge	90% @0.2C
	Efficiency of Discharge	96~99% @1C
Standard Charge	Charge Voltage	58.4 ± 0.2V
	Charge Mode	0.2C to 58.4V, then 58.4,charge current 0.02C(CC/CV)
	Charger Current	25A
	Max. Charge Current	50A
	Charge Cut-off Voltage	59.2V ± 0.2V
Standard Discharge	Continuous Current	100A
	Max. Pulse Current	150A(<3s)
	Discharge Cut-off Voltage	40V
Environmental	Charge Temperature	0°C to 45°C (32F to 113F) @60±25% Relative Humidity
	Discharge Temperature	-20°C to 60°C (-4F to 140F) @60± 25% Relative Humidity
	Storage Temperature	0°C to 40°C (32F to 104F) @60± 25% Relative Humidity
	Water Dust Resistance	
Mechanical	Cell & Method	3.2V25AH-16S4P
	Plastic Case	standard case
	Dimensions (in./mm.)	570*360*140MM
	Weight (lbs./kg.)	47Kg
	Terminal	Energy storage connector
	Protocol (optional)	RS485/CAN
	BMS	16S100A

Product Design

BMS

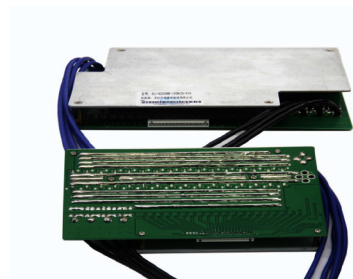

LiFePO4 Cell Package



LiFePO4 in Box



* Specifications subject to change without notice